


# SMB003-0100-43

in Flex-Bolt® Sandwich Mounts (UNC Thread) Type 1

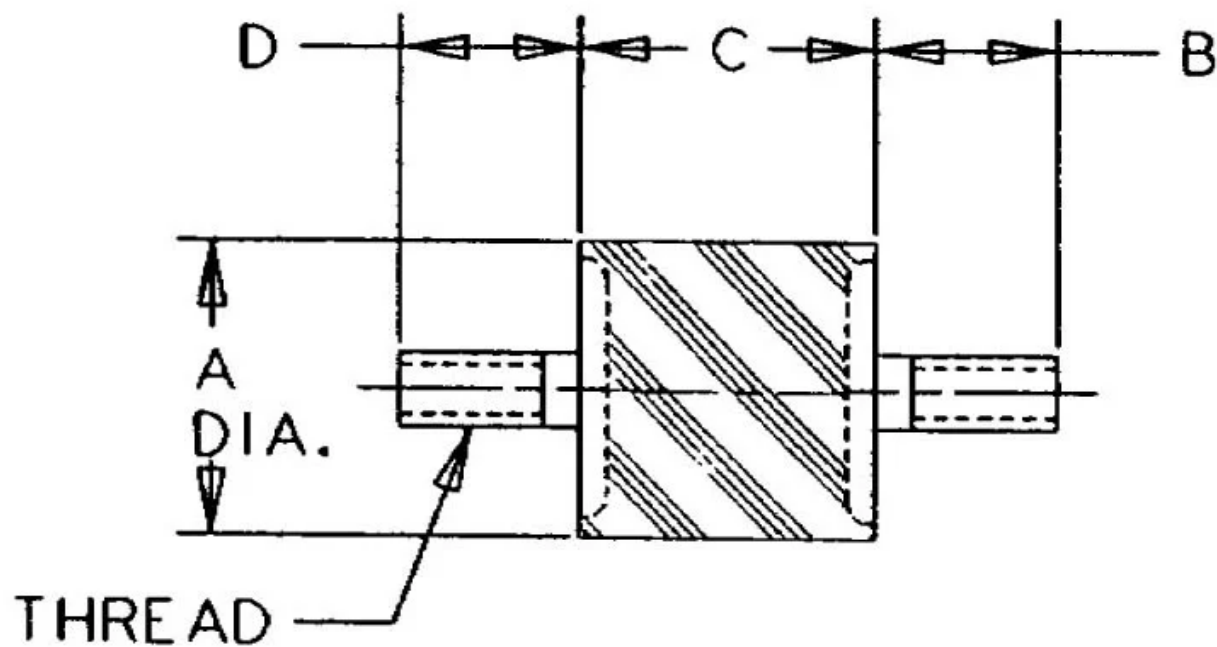

Flex-Bolt® Sandwich Mounts are Manufactured by LORD Corporation.

- Economical.
- Compact and lightweight.
- Easy to install.
- Maintenance-free.
- Three size groups: small, medium and large.

Flex-Bolt® Sandwich mounts are manufactured by LORD Corporation.

Flex-Bolt® Sandwich Mounts are designed to protect equipment, machinery and sensitive components against damaging vibration. This family of mounts has excellent capacity for energy control. Constructed with high-strength bonds and specially compounded elastomers, these mounts provide high load carrying capacity and assure long life.

The simple design and unitized construction provide low-cost mounting systems which are compact, lightweight, easy to install and maintenance free.

If you don't see the size you need, contact us - we can help.

## Specifications

|                                       |                                    |
|---------------------------------------|------------------------------------|
| COMPRESSION STATIC LOAD (LBS)         | 11                                 |
| COMPRESSION STATIC LOAD (N)           | 49                                 |
| COMPRESSION - SPRING RATE KC (LBS/IN) | 143                                |
| COMPRESSION - SPRING RATE KC (N/MM)   | 25                                 |
| SHEAR STATIC LOAD (LBS)               | 2.5                                |
| SHEAR STATIC LOAD (N)                 | 11                                 |
| SHEAR - SPRING RATE KS (LBS/IN)       | 30                                 |
| SHEAR - SPRING RATE KS (N/MM)         | 5                                  |
| A (IN)                                | 0.38                               |
| B (IN)                                | 0.38                               |
| C (IN)                                | 0.5                                |
| D (IN)                                | 0.38                               |
| THREAD SIZE                           | 8-32 UNC                           |
| DUROMETER                             |                                    |
| ELASTOMER                             | Oil Resistant Elastomer - Neoprene |
| THREAD TYPE                           | Standard UNC                       |
| PRODUCT TYPE                          | Mounts                             |
|                                       |                                    |

|                    |   |
|--------------------|---|
| GRADE PER SAE J429 | 1 |
|--------------------|---|