
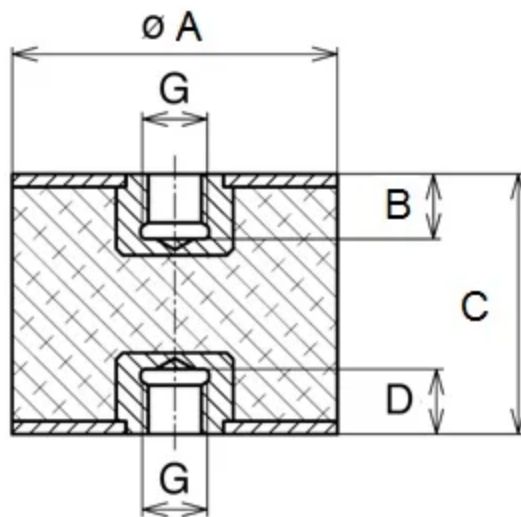


VMC-5045M

in Sandwich Mounts (Metric Thread) Type 4



RPM Rubber Flex Sandwich Mounts are designed to protect equipment and machinery against damaging vibration. This family of mounts has excellent capacity for energy control.

Constructed with high-strength bonds and specially compounded elastomers, these mounts provide high load-carrying capacity and assure long life.

The simple design and unitized construction provide low-cost mounting systems which are compact, lightweight, easy to install and maintenance-free.

Typical applications for Rubber Flex Sandwich Mounts include business machines, motorcycles, heating, ventilating and air conditioning equipment, light motors, appliances, shipping containers, feeders, compactors and vibratory rollers.

| | |
|---------------------------------------|----------------|
| COMPRESSION STATIC LOAD (LBS) | 553 |
| COMPRESSION STATIC LOAD (N) | 2371 |
| COMPRESSION - SPRING RATE KC (LBS/IN) | 90 |
| COMPRESSION - SPRING RATE KC (N/MM) | 509 |
| SHEAR STATIC LOAD (LBS) | 178 |
| SHEAR STATIC LOAD (N) | 790 |
| SHEAR - SPRING RATE KS (LBS/IN) | 19 |
| SHEAR - SPRING RATE KS (N/MM) | 108 |
| A (IN) | 2 |
| B (IN) | 0.39 |
| C (IN) | 1.77 |
| D (IN) | 0.39 |
| THREAD SIZE | M10 |
| DUROMETER | 68 |
| ELASTOMER | Natural Rubber |
| PRODUCT TYPE | |
| MANUFACTURER | RPM Mechanical |
| TYPE | 4 |
| GRADE PER SAE J429 | |