


# VMA-1035AU

in Sandwich Mounts (UNC Thread) Type 1

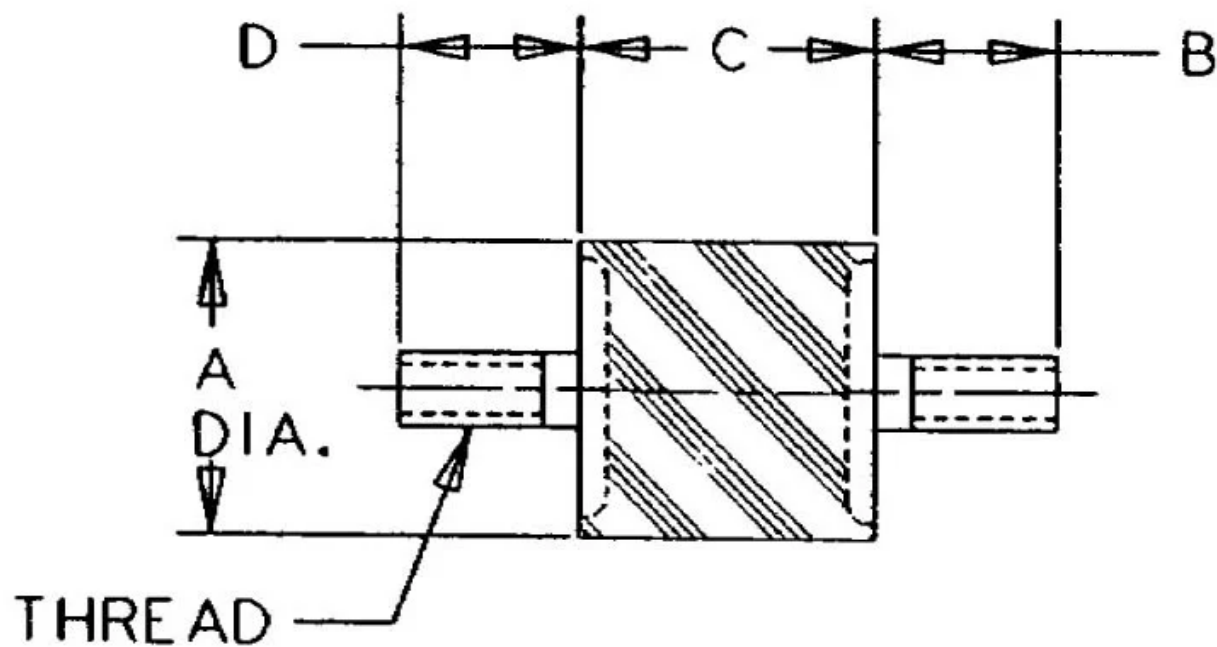

- Economical.
- Compact and lightweight.
- Easy to install.
- Maintenance-free.
- Three size groups: small, medium and large.
- Unitized construction.

high load-carrying capacity and assure long life.

The simple design and unitized construction provide low-cost mounting systems which are compact, lightweight, easy to install and maintenance-free.

These mounts are available in three size groups to suit a variety of applications. Small Rubber Flex Bobbin Sandwich Mounts are available in metric and standard (UNC) threads.

Typical applications for Rubber Flex Bobbin Sandwich Mounts include business machines, motorcycles, heating, ventilating and air conditioning equipment, light motors, appliances, shipping containers, feeders, compactors and vibratory rollers.

## Specifications

COMPRESSION STATIC LOAD (LBS)	2337
COMPRESSION STATIC LOAD (N)	10399
COMPRESSION - SPRING RATE KC (LBS/IN)	14504
COMPRESSION - SPRING RATE KC (N/MM)	2568
SHEAR STATIC LOAD (LBS)	780
SHEAR STATIC LOAD (N)	3466
SHEAR - SPRING RATE KS (LBS/IN)	1725
SHEAR - SPRING RATE KS (N/MM)	308
A (IN)	4
B (IN)	1.77
C (IN)	1.38
D (IN)	1.77
THREAD SIZE	5/8-11 UNC
DUROMETER	57
ELASTOMER	Natural Rubber
THREAD TYPE	Standard UNC
PRODUCT TYPE	Mounts

TYPE	1
GRADE PER SAE J429	1