


# VMA-1035KU

in Sandwich Mounts (UNC Thread) Type 1

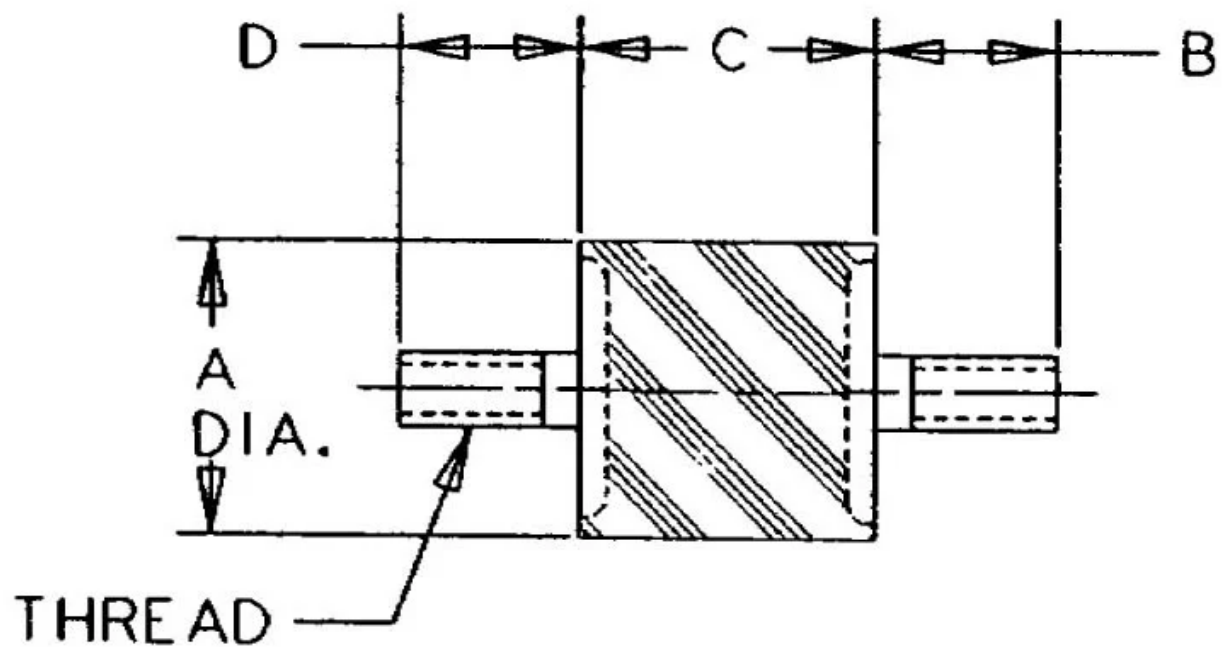

- Economical.
- Compact and lightweight.
- Easy to install.
- Maintenance-free.
- Three size groups: small, medium and large.
- Unitized construction.

high load-carrying capacity and assure long life.

The simple design and unitized construction provide low-cost mounting systems which are compact, lightweight, easy to install and maintenance-free.

These mounts are available in three size groups to suit a variety of applications. Small Rubber Flex Bobbin Sandwich Mounts are available in metric and standard (UNC) threads.

Typical applications for Rubber Flex Bobbin Sandwich Mounts include business machines, motorcycles, heating, ventilating and air conditioning equipment, light motors, appliances, shipping containers, feeders, compactors and vibratory rollers.

## Specifications

COMPRESSION STATIC LOAD (LBS)	3793
COMPRESSION STATIC LOAD (N)	16876
COMPRESSION - SPRING RATE KC (LBS/IN)	23545
COMPRESSION - SPRING RATE KC (N/MM)	4167
SHEAR STATIC LOAD (LBS)	1264
SHEAR STATIC LOAD (N)	5625
SHEAR - SPRING RATE KS (LBS/IN)	2811
SHEAR - SPRING RATE KS (N/MM)	499
A (IN)	4
B (IN)	1.77
C (IN)	1.38
D (IN)	1.77
THREAD SIZE	5/8-11 UNC
DUROMETER	68
ELASTOMER	Natural Rubber
THREAD TYPE	Standard UNC
PRODUCT TYPE	Mounts

TYPE	1
GRADE PER SAE J429	1