


VMA-2519AU13C

in Sandwich Mounts (UNC Thread) Type 1

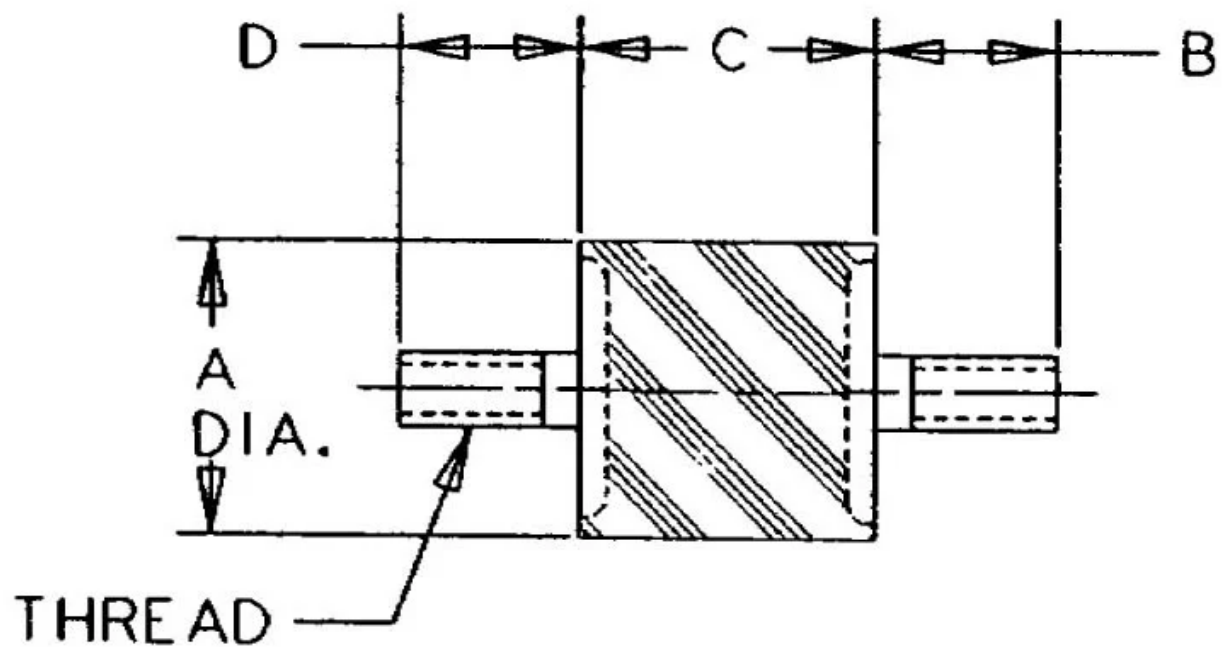

- Economical.
- Compact and lightweight.
- Easy to install.
- Maintenance-free.
- Three size groups: small, medium and large.
- Unitized construction.

high load-carrying capacity and assure long life.

The simple design and unitized construction provide low-cost mounting systems which are compact, lightweight, easy to install and maintenance-free.

These mounts are available in three size groups to suit a variety of applications. Small Rubber Flex Bobbin Sandwich Mounts are available in metric and standard (UNC) threads.

Typical applications for Rubber Flex Bobbin Sandwich Mounts include business machines, motorcycles, heating, ventilating and air conditioning equipment, light motors, appliances, shipping containers, feeders, compactors and vibratory rollers.

Specifications

COMPRESSION STATIC LOAD (LBS)	64
COMPRESSION STATIC LOAD (N)	285
COMPRESSION - SPRING RATE KC (LBS/IN)	620
COMPRESSION - SPRING RATE KC (N/MM)	109
SHEAR STATIC LOAD (LBS)	12
SHEAR STATIC LOAD (N)	53
SHEAR - SPRING RATE KS (LBS/IN)	105
SHEAR - SPRING RATE KS (N/MM)	18
A (IN)	1
B (IN)	1/2
C (IN)	0.75
D (IN)	0.5
THREAD SIZE	1/4-20 UNC
DUROMETER	43
ELASTOMER	Oil Resistant Elastomer - Neoprene
THREAD TYPE	Standard UNC
PRODUCT TYPE	Mounts

TYPE	1
GRADE PER SAE J429	1