


283P-500

in Heavy-Duty Platform Mounts (Square)

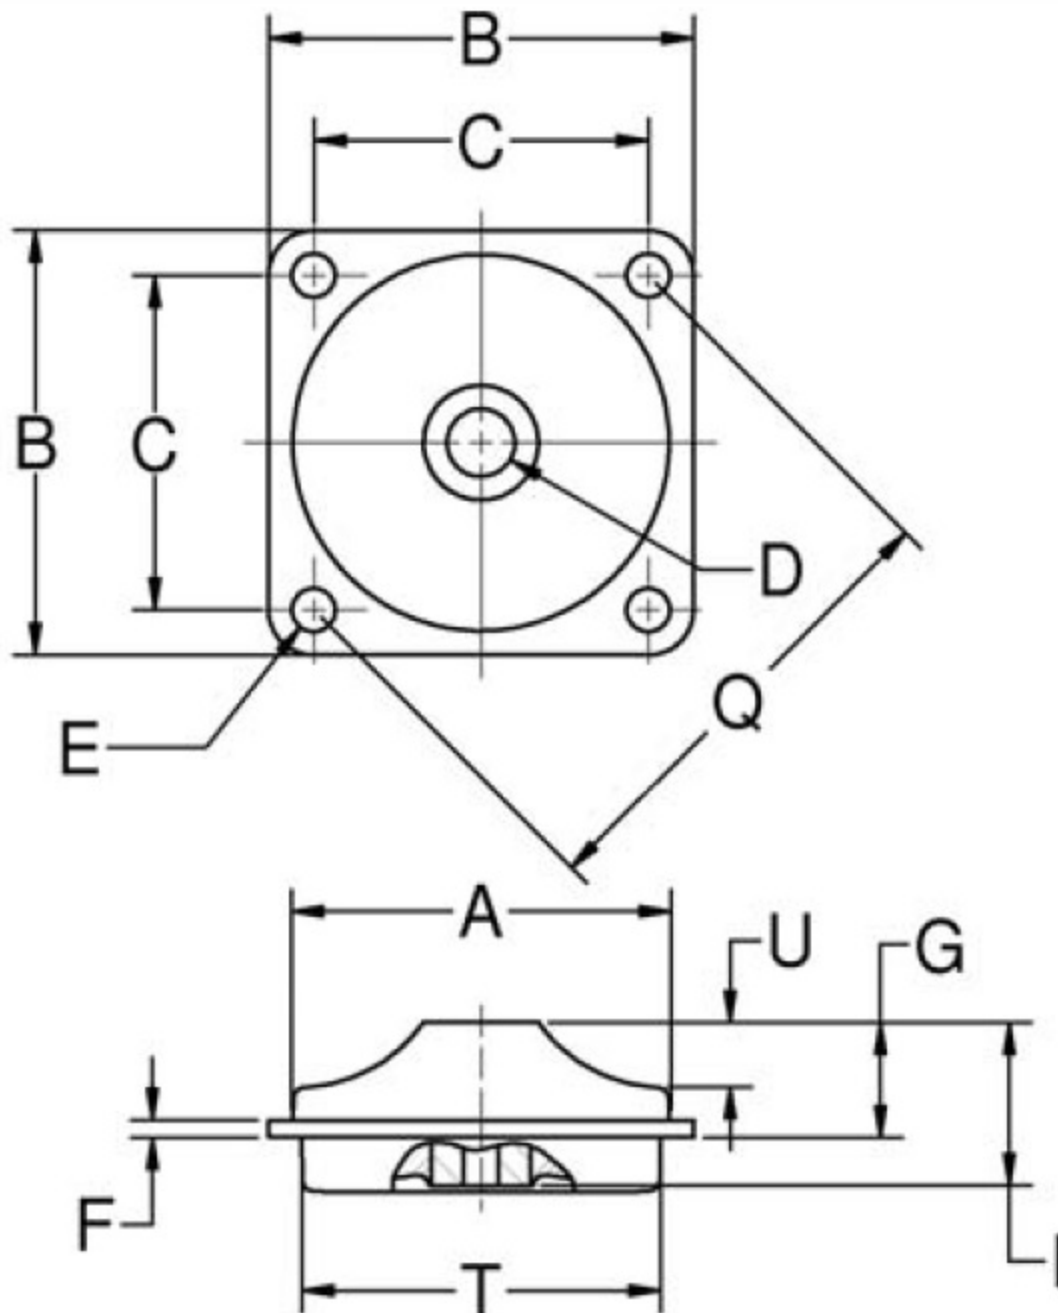

These versatile mounts are available in three types, each type featuring square, diamond or holder configurations to suit a variety of design requirements. The three types, Platform Mounts, Heavy-Duty Platform Mounts and Multiplane Mounts, offer a range in load ratings from 0.5 to 600 pounds.

Snubbing washers provide an interlocking system of metal parts which act to prevent damage from overload or excessive shock impact.

Lord Platform Mounts are easy to install and provide space efficiency. Typical applications include electronic equipment, business machines, medical equipment and small pumps, engines and gen sets.

- Three types of mounts for different applications.
- Square, diamond or holder configurations to suit a variety of design needs.
- Load ratings from 0.5 to 600 pounds per mount.
- Uniform stress distribution.
- Easy to install.

Specifications

A (IN)	2.88
B (IN)	3.25
C (IN)	2.562
D (IN)	0.516
E (IN)	0.328
F (IN)	0.125
F (MM)	3.2
L (IN)	
L (MM)	
MATERIAL	Steel
INSIDE DIAMETER (IN)	0.52
MAX. AXIAL RATED LOAD @ 1/16 IN (1.58 MM) DEFLECTION (LBS)	500

AXIAL STATIC SPRING RATE (LBS/IN)	2000
AXIAL STATIC SPRING RATE (N/MM)	350.7
G (IN)	1.62
G (MM)	41.1
I (IN)	2.5
I (MM)	63.5
O (IN)	3.88
O (MM)	98.6
Q (IN)	0.62
Q (MM)	91.9
MAX AXIAL LOAD RATING (LBS)	500
MAX AXIAL LOAD RATING (N)	2224
THICKNESS (IN)	0.125
THICKNESS (MM)	3.2
K (IN)	6.5
K (MM)	165.1
PRODUCT TYPE	Mounts
MANUFACTURER	Lord Corporation
SERIES	283
ENCLOSURE SHAPE	Square
P (IN)	0.22
P (MM)	5.63
U (IN)	0.5

OUTSIDE DIAMETER (MM)	73.2
T (IN)	2.75
T (MM)	69.9
RECOMMENDED STEEL WASHER	J-2049-4
VR (IN)	2.25
VR (MM)	57.2