
J-11729-125

in Flex-Bolt® Sandwich Mounts (UNC Thread) Type 1



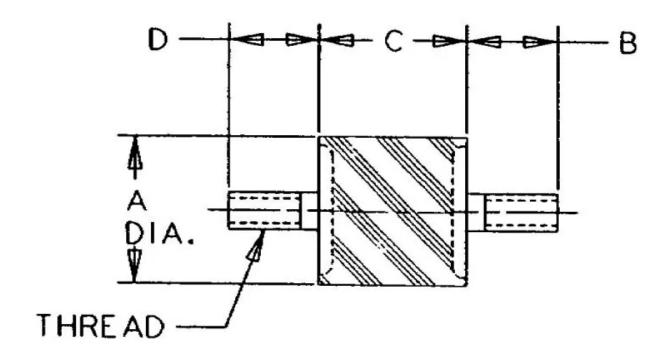

Flex-Bolt® Sandwich Mounts are Manufactured by LORD Corporation.

- Economical.
- Compact and lightweight.
- Easy to install.
- Maintenance-free.
- Three size groups: small, medium and large.

FIGA DOTED BUTTOM TO THE GITTE WITH THE TOTAL BY LOTAL COMPONICTION

Flex-Bolt® Sandwich Mounts are designed to protect equipment, machinery and sensitive components against damaging vibration. This family of mounts has excellent capacity for energy control. Constructed with high-strength bonds and specially compounded elastomers, these mounts provide high load carrying capacity and assure long life.

The simple design and unitized construction provide low-cost mounting systems which are compact, lightweight, easy to install and maintenance free.

If you don't see the size you need, contact us - we can help.

Specifications

COMPRESSION STATIC LOAD (LBS)	420
COMPRESSION STATIC LOAD (N)	1868
COMPRESSION - SPRING RATE KC (LBS/IN)	2000
COMPRESSION - SPRING RATE KC (N/MM)	350
SHEAR STATIC LOAD (LBS)	50
SHEAR STATIC LOAD (N)	222
SHEAR - SPRING RATE KS (LBS/IN)	380
SHEAR - SPRING RATE KS (N/MM)	67
A (IN)	1.5
B (IN)	0.75
C (IN)	1
D (IN)	0.75
THREAD SIZE	3/8-16 UNC
DUROMETER	56
ELASTOMER	Natural Rubber
THREAD TYPE	Standard UNC
PRODUCT TYPE	Mounts

GRADE PER SAE J429	1