
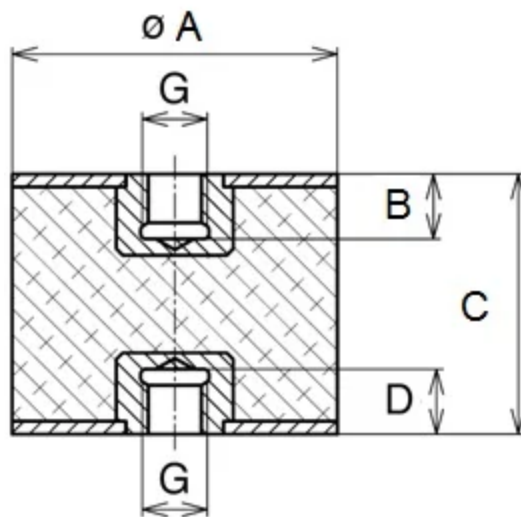


VMC-7540M

in Sandwich Mounts (Metric Thread) Type 4



RPM Rubber Flex Sandwich Mounts are designed to protect equipment and machinery against damaging vibration. This family of mounts has excellent capacity for energy control.

Constructed with high-strength bonds and specially compounded elastomers, these mounts provide high load-carrying capacity and assure long life.

The simple design and unitized construction provide low-cost mounting systems which are compact, lightweight, easy to install and maintenance-free.

Typical applications for Rubber Flex Sandwich Mounts include business machines, motorcycles, heating, ventilating and air conditioning equipment, light motors, appliances, shipping containers, feeders, compactors and vibratory rollers.

COMPRESSION STATIC LOAD (LBS)	1671
COMPRESSION STATIC LOAD (N)	7432
COMPRESSION - SPRING RATE KC (LBS/IN)	325
COMPRESSION - SPRING RATE KC (N/MM)	1838
SHEAR STATIC LOAD (LBS)	557
SHEAR STATIC LOAD (N)	2477
SHEAR - SPRING RATE KS (LBS/IN)	50
SHEAR - SPRING RATE KS (N/MM)	281
A (IN)	3
B (IN)	0.47
C (IN)	1.57
D (IN)	0.47
THREAD SIZE	M12
DUROMETER	68
ELASTOMER	Natural Rubber
PRODUCT TYPE	
MANUFACTURER	RPM Mechanical
TYPE	4
GRADE PER SAE J429	